


MYERS® Accessories

Pressure Switches

ORDERING INFORMATION												
ELECTRIC CONTROL SWITCHES												
Cat. No.	Part No.	Factory Pressure Setting	Cut-Off Pressure (Range)	Differential Pressure	Minimum Cut-Off Pressure	Manufacturer's Rating Max. Motor HP						Pipe Connection NPTF
						1 PH AC		3 PH AC		DC		
						115V	230V	230V	460V	575V	115/575V	
PS10D4	15760A000K	20-40	20-65	10-30		1-1/2 HP	2 HP	3 HP			1/4 HP	1/4"
PS10D5	15760A001K	30-50										
PS10D6	15760A002K	40-60										
PS20D4	15761A000K	20-40	20-80	10-31		2 HP	3 HP	5 HP	5 HP	5 HP	1/2 HP	1/4"
PS20D5	15761A001	30-50										
ELECTRIC CONTROL SWITCHES WITH LOW PRESSURE CUT-OFF												
PS10D4C	19180A000K	20-40	20-65	10-30	10*	1 HP	1 HP	1 HP			1/4 HP	1/4"
PS10D5C	19180A001K	30-50	20-65	10-30	20	1 HP	1 HP	1 HP			1/4 HP	1/4"
PS10D6C	19180A002K	40-60	20-65	10-30	30	1 HP	1 HP	1 HP			1/4 HP	1/4"

All switches are 2-pole.

Code Explanation for Pressure Switch Catalog Numbers

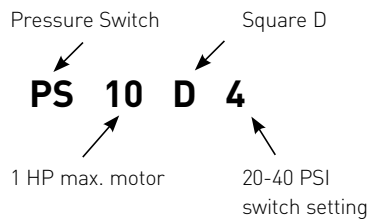

PS stands for Pressure Switch

The number following stands for maximum HP to be used on

The next letter stands for the switch manufacturer

The next number stands for the highest pressure of the factory set switch setting

Valves and Regulators

ORDERING INFORMATION						
PRESSURE RELIEF VALVES						
Catalog No.	Pipe Size	GPM Maximum	Minimum Setting Lbs./Sq. In.	Regular Setting Lbs./Sq. In.	Maximum Setting Lbs./Sq. In.	Ship Wt. Lbs.
06430B011K	3/4"	17	25	75	90	1-1/4
EJECTOR PRESSURE REGULATORS						
Catalog Number	Pipe Size In.	Used On				
15495B000K	3/4"	HC33, HC50, HCM50, HCM75				
15496B000K	1"	HC75, HC100, HCM100, HCM150, HJA75D, HJA100D, HJ75D, HJ100D				
13980A001K	1"	HJA33D, HJA50D, HJ50D, HR50D				
AUTOMATIC AIR VOLUME CONTROL - Deep Well						
Vents excess air from tank on all systems which charge tank with air on each operating cycle. Set to prevent air below 30 lbs. tank pressure but adjustable 15 to 40 lbs. Used on deep well ejectors, deep well reciprocating and submersible systems.						
Catalog Number	Gauge Taping	Tank Connection	Max. Operating Pressure	Ship Wt. Oz.		
05857A002K	1/4"	1-1/4"	65 lbs.	6		

MYERS® Accessories

Valves and Regulators

ORDERING INFORMATION					
AUTOMATIC AIR CHARGING CONTROL					
Charges air on each operating cycle. Air is not handed through pump. Copper tube and fitting not included with control for replacement but required in installation. Not recommended for reciprocating pumps.					
Catalog Number	NPT	Description			
13809A000K	3/8"	82 gallon tanks and smaller			
14446A000K	3/8"	Packaged control with tube fittings			
AIR VALVES					
Used with reciprocating, jet and submersible pumps to admit air into system.					
Catalog Number	NPT	Used With			
05000A000	1/8"	Water systems			
05000A010	1/4"	Air guard tanks			
CHECK VALVES - Vertical or Horizontal					
Catalog Number	Part Number	Description	Pipe Size	Can Be Used in Pipe Size	Ship Wt. Lbs.
CVA-75	26370A001	3/4" No-Lead Brass Check Valve	3/4"	1-1/4"	1
CAP-10	26370A002K	1" No-Lead Brass Check Valve	1"	2"	1-1/4
CAP-12	26370A003K	1-1/4" No-Lead Brass Check Valve	1-1/4"	2"	1-3/4
CAP-15	26370A004K	1-1/2" No-Lead Brass Check Valve	1-1/2"	3"	2-1/4
CAPD-20	24429A017	2" No-Lead Brass Check Valve	2"	3-1/2"	5
CAPD-40	23799A010K	4" No-Lead Brass Check Valve	4"	6"	25
VERTICAL FOOT VALVES					
FVP-75	26369A001K	3/4" No-Lead Brass Check Valve	3/4"	3/4"	3/4
FVP-10	26369A002K	1" No-Lead Brass Check Valve	1"	1"	1
FVP-12	26369A003K	1-1/4" No-Lead Brass Check Valve	1-1/4"	1-1/4"	1-1/4
FVP-15	26369A004	1-1/2" No-Lead Brass Check Valve	1-1/2"	3"	2
FVP-20		2" No-Lead Brass Check Valve	2"	3-1/2"	3
EXTERNAL SUBMERSIBLE PUMP CHECK VALVES					
Catalog Number	Part Number	Description	Ship Wt. Lbs.		
CAP-14	24429A012	1" F x 1-1/4" No-Lead Check Valve	2		
CAP-16	24429A013K	1-1/4" F x 1-1/4" No-Lead Check Valve	2		
CAPD-20	24429A017	2" F x 2" M Ductile Iron Check Valve	3-1/2		

MYERS® Accessories

Well Adapters, Seals

ORDERING INFORMATION						
UNIVERSAL WELL ADAPTERS						
For all packer installations. Designed for over-the-well installations with vertical pumps and concentric piping installations with horizontal pumps.						
Catalog Number	Part Number	Well Size	Number of Bolts	Drop Pipe	Delivery Pipe	Pressure Pipe
UA2-20	19251C010	2"t	2	1"	1-1/4"	1-1/4"
UA2-20A	19251C011	2"	2	1-1/4"	1-1/4"	1-1/4"
90° TYPE WELL ADAPTERS						
For offset packer installations with horizontal pumps and concentric piping installations with vertical pumps.						
Horizontal Adapter	18021C000K	2"	*	1"	1-1/4"	1-1/4"
HA2-20	19253C010	2"	2	1"	1-1/4"	1-1/4"
HA2-20A	19253C011	2"	2	1-1/4"	1-1/4"	1-1/4"

*No bolts holes – inlet and outlet openings are threaded

OPEN CENTER CUP LEATHERS		
Catalog Number	O.D.	Diameter of Hole
05099A012K	1-13/16"	1-1/8"
05099A015K	2"	1-5/16"
05099A017K	2-1/2"	1-11/16"
05099A019K	3"	1-15/16"
SOLID CENTER CUP LEATHERS		
05064A019K	1-5/16"	9/16"
05064A023K	1-1/2"	9/16"

WATER PRESSURE GAUGE					
Catalog No.	Description	Connection 1/4" NPT	Case Construction	Face Diameter	Ship Wt. Oz.
05003A001K	100 PSI Pressure Gauge	1/4" Bottom Mount	Plastic	2"	4

MYERS® Accessories

